

go2signals

PROCITEC®
HOUSE OF SIGNALS

PROCITEC GmbH
Rastatter Strasse 41
75179 Pforzheim
Germany

Phone +49 7231 155 61-0
Fax +49 7231 155 61-11
sales@procitec.com
www.go2signals.de / www.procitec.com



24.1 / 2024 (subject to modification)

**GO2SIGNALS
MONITORING
AND ANALYSIS**

V 24.1



go2signals

GO2SIGNALS IS AN INNOVATIVE SOFTWARE PACKAGE, DESIGNED TO MEET TODAY'S TACTICAL AND STRATEGIC REQUIREMENTS IN THE FIELDS OF RADIO-MONITORING, COMMUNICATIONS INTELLIGENCE AND ELECTRONIC SURVEILLANCE.

GO2SIGNALS IS EXACTLY WHAT YOU NEED

go2signals covers the full spectrum of **software-based** signal processing. From SLF to SHF, specializing in HF and V/UHF signals. It offers functionalities for searching, monitoring, processing and analysis of **radio signals**.


These capabilities are used for the intercept and monitoring of Frequencies and Signals Of Interest in the RF spectrum to derive Indications & Warnings for Situational Awareness. **Automation** features enable the separation of Signals Not Of Interest to focus on those emissions which will deliver the insight required by the decision-maker. You can **optimize** the operator's workload to keep up with the evolving signal environment by focusing on new and unidentified **emissions**.

All of this enables the implementation of extensive use cases and operational scenarios in land, sea and air environments for military and civil use.

PROTECTION THROUGH KNOWLEDGE

Wireless communications signals are an indicator of the current situation. go2signals enables the capture, evaluation and understanding of the surrounding signal environment.

The suite provides all the necessary capabilities for capturing signal parameters, meta-information and content. This knowledge enables confident decision making to develop the intelligence picture and stabilize the security situation; decision quality is enhanced due to trust in the derived results.



go2signals
THE MOVIE

www.procitec.com/company




GO2SIGNALS WORKFLOW

With go2signals you have the whole range of communication signal processing capabilities at your disposal.

This workflow starts with the Monitoring Suite which offers the main working environment to determine the 'big picture' from all signals received.

The Analysis Suite helps to adapt to new and unknown signals by creating new classifiers and decoders. With the ability to import them into the Monitoring Suite workflow to improve its capabilities.


Optimizations and Customizations enable tailoring and automation of the output / results in relation to quality, quantity, and reliability to satisfy the mission-specific needs of the customer. In turn, this enables the management of available resources in the most efficient way, delivering the best possible results.

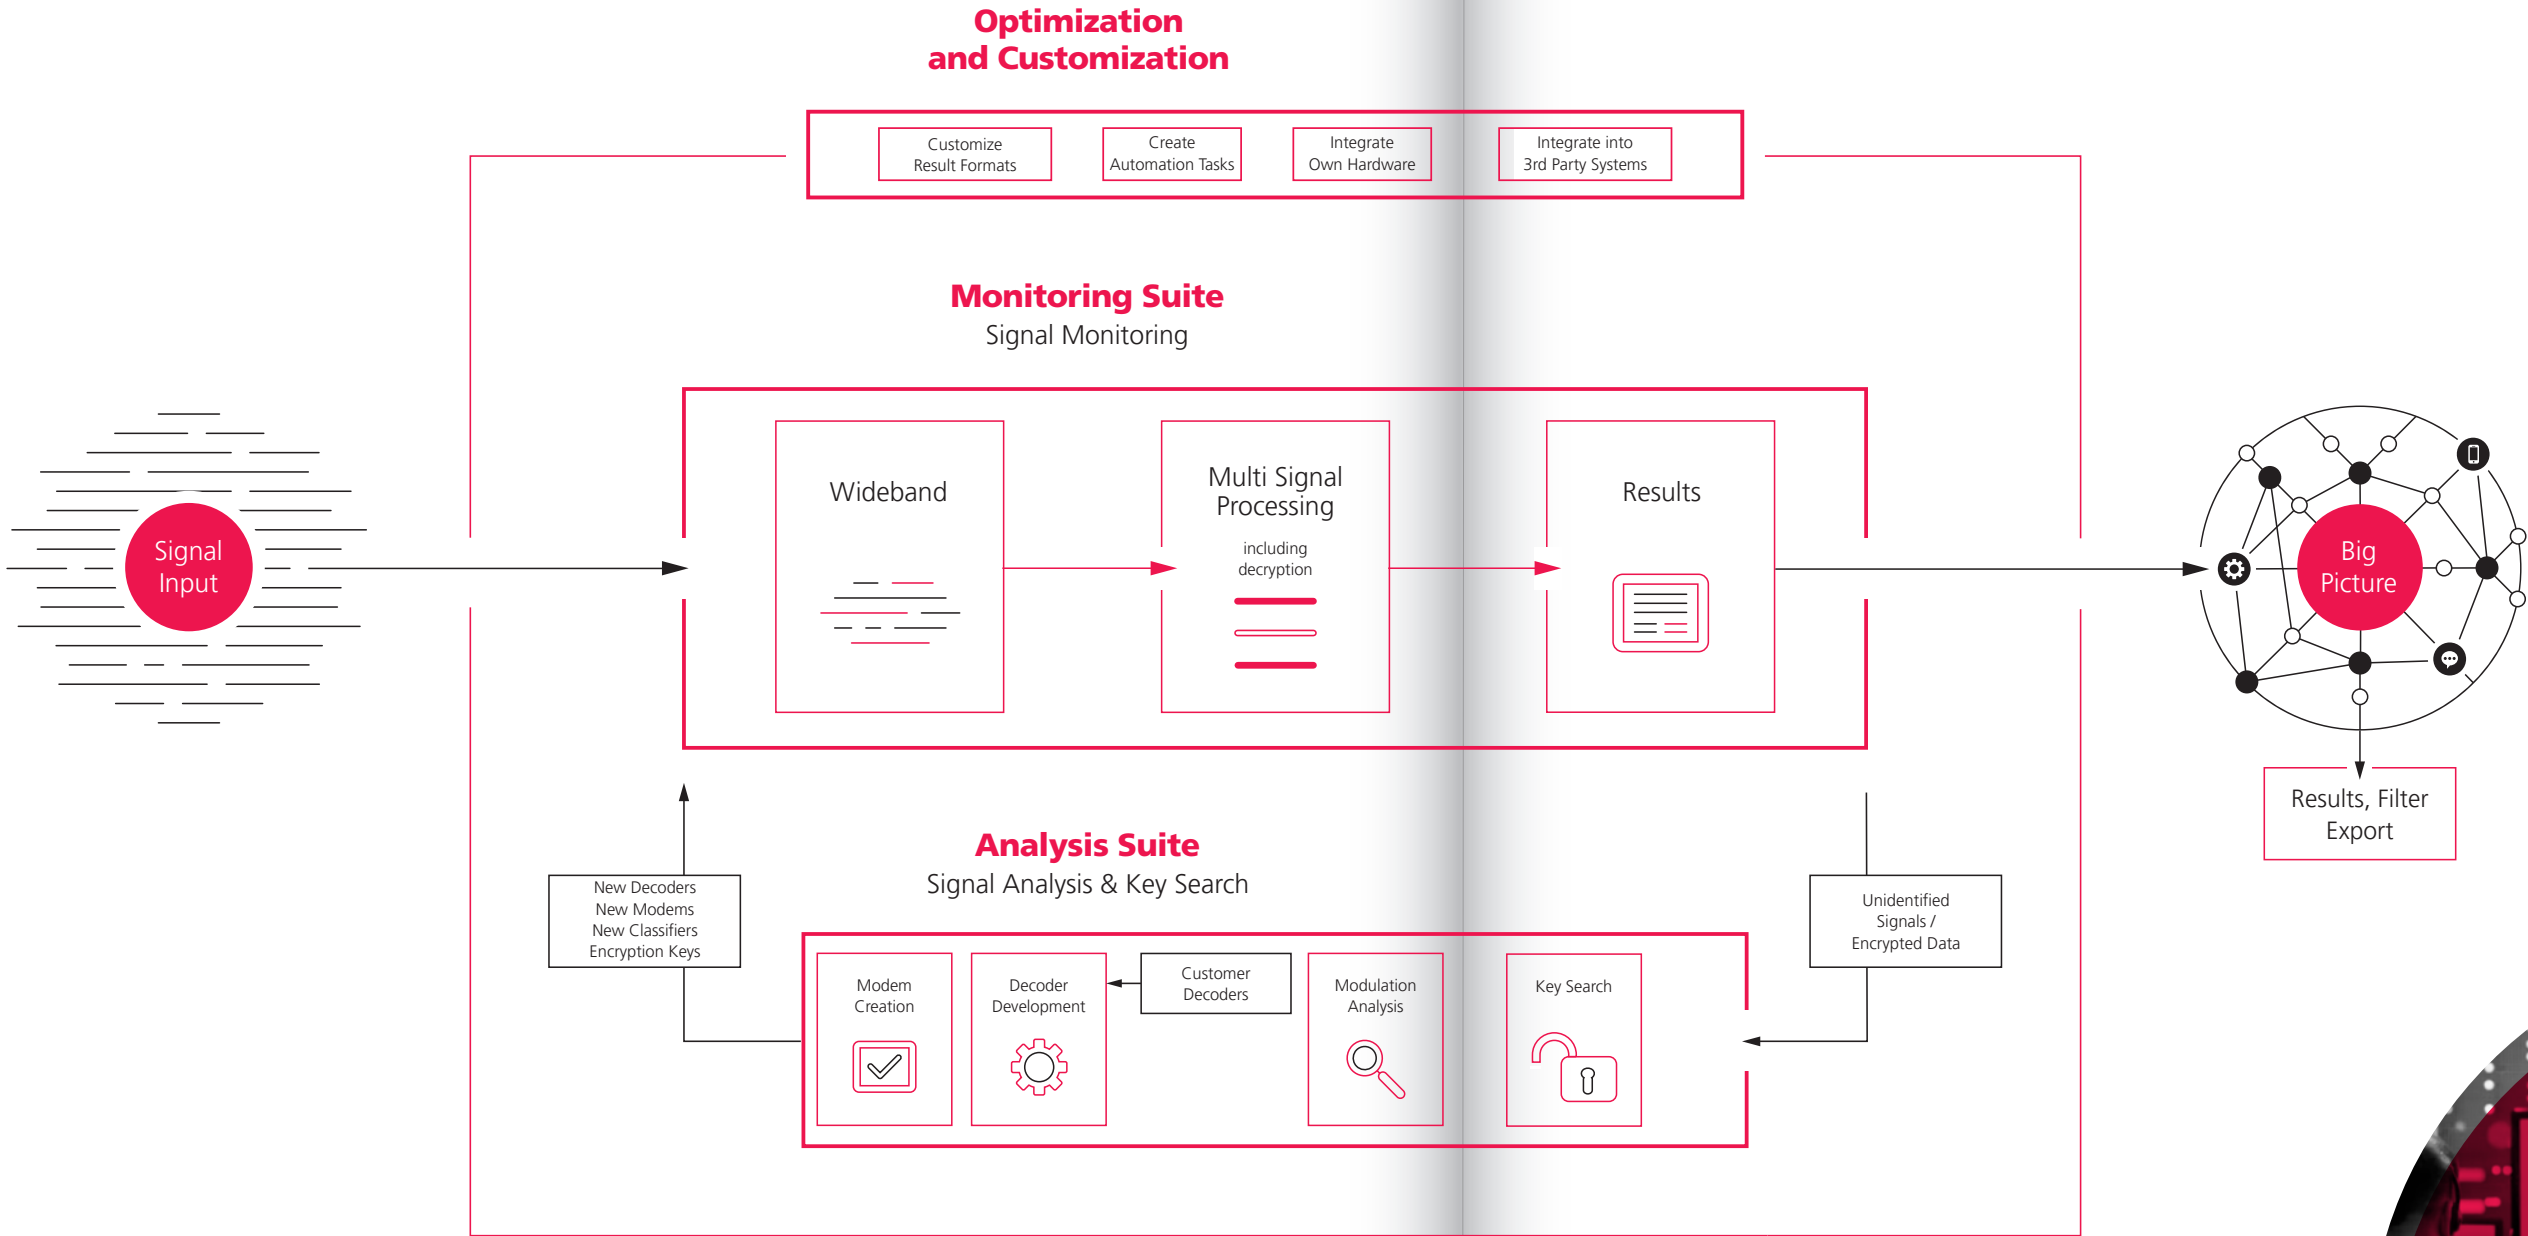

SIGNAL MONITORING

Detect, intercept and process signals automatically or manually. Monitor an entire wideband frequency range and interact with lots of signals and channels simultaneously.

- Identify SOI's faster and react more quickly
- Save time by automation of processing chains and focus on the signal content
- Monitor frequency bands, stay on track
- Save time and system resources

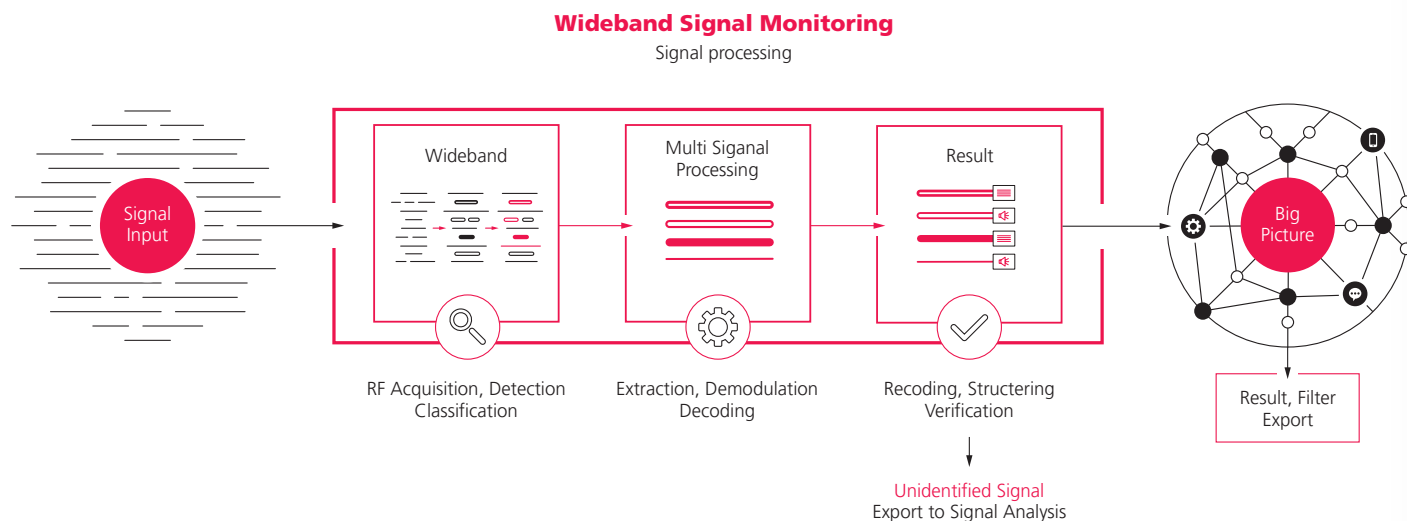

RF INPUT

Getting the 'big picture' starts with receiving RF signals. go2signals supports a wide range of common narrow- and wideband receivers. Connect receivers either with existing drivers or based on open interfaces e.g. ExtIO or VITA 49.

- Start right out of the box: Software adapts to sampling rates and data formats; no manual configuration is required.
- Control multiple wideband receiver models even sourced from different manufacturers, using the same user-friendly GUI. This saves time and reduces operator workload and skillfade.
- Memory Step and Memory Scan enable automated band stepping and sweeping capabilities even on Low Size, Weight and Power hardware platforms such as laptop PCs. This saves money and facilitates mobile use.
- The plugin interface allows integrators and receiver manufacturers to connect their receivers with features such as multichannel inputs, overview spectrum, receiver control and more.

WIDEBAND DETECTION AND CLASSIFICATION

Wideband processing is one of the strengths of go2signals. Signals are detected and classified directly in the band, all in parallel, fast and reliably. Even wideband emissions and short bursts are recognized in this way and complete emissions are tracked. Signals parameters such as frequency, energy, duration, modulation type and modem type etc. are used to filter and clarify results to maintain the Situational Awareness picture.

- Detection and classification of all in-band signals immediately and at the push of a button.
- The use of these signal parameters classified directly from the wideband input makes it easy to identify SOIs.
- Continuous classification and tracking of all emissions in automatic mode.
- Analogue voice and modulation classification of digital modems with an extensive modulation type library: Standard, PMR/SAT and MIL.

MULTI CHANNEL PROCESSING

Signals of Interest are assigned manually or automatically from the wideband spectrum to the multi channel processing capabilities.

Signals are processed according to types: analogue signals are demodulated, digital voice and data transmissions are demodulated and decoded. With multi channel processing no signal is lost, even in the case of highly occupied frequency bands.

go2signals combines 35 different demodulators and around 200 decoders supporting more than 350 available modem types bundled in Standard, PMR/SAT and MIL packages. Custom decoders are easy to develop and integrate using the Decoder Development Environment.

- Each processing channel provides full processing features including classification, recording, demodulation and decoding. Features of the channels are not restricted.
- Extensive decoder library: Standard, PMR/SAT and MIL.



SIGNAL MONITORING SUITE



- 1 Receiver input overview and control
- 2 Wideband streaming input spectrogram and spectrum
- 3 Wideband classifier results
- 4 Automatic monitoring mission control
- 5 Selected manual decoding channel:
 - a Input spectrogram
 - b Classifier results
 - c Automatic modem recognition
 - d Decoded text output and live listening



MONITORING SUITE

Technical Specifications Document
www.procitec.com/go2signals-specifications-monitoring



DECODERLIST

List of all available Decoders
www.procitec.com/go2signals-decoderlist



GO2SIGNALS FOR INTEGRATORS

Brochure
www.procitec.com/go2signals-brochure-integrators

RESULTS

The internal results database stores every result, meta-data, content and recordings from „Detection and Classification“ and „Multi Channel Processing“. Modem and protocol specific, automatic post-processing scripts are used to extract important information from decoded text such as sender and recipient IDs or position data. To work on results go2signals includes the ResultViewer, a special tool for filtering, displaying, replaying, tagging, structuring, combining and exporting the results to assist in development of the ‚big picture‘.

- All results are automatically stored and structured in a database
- Automatic post-processing is pre-defined or by customer scripting
- Results are in tabular or graphical representation and can be exported to 3rd-party analysis applications
- Powerful filtering, sorting, grouping, marking, audio-monitoring, viewing, editing and exporting options

MANUAL AND AUTOMATIC

Live monitoring or offline processing of results, fully automatic processing or manual control, or a combination of each, go2signals supports different processing modes to meet the users' needs. With AMT (Automatic Monitoring and Tasking), plan your mission in advance, trigger on SOIs and develop the ‚big picture‘ fully automatically; even full autonomous processing is possible.


- Monitor the entire signal environment in one frequency range automatically (HFV/UHF)
- Complete input buffering to capture the entire signal (first bit)
- Dynamically shared resources to optimize hardware performance
- Mission and task control using operator-defined prioritization
- Task defining and mission planning including trigger setting and definition of start/stop criteria
- Alert based on signal events (popup display)
- „Scheduling“ activating automatic execution of routine tasks at user-defined time periods
- Detection of short-duration and sporadic signals
- Automatic processing of large customer-derived signal recording libraries (Bulk File Processing)



SIGNAL ANALYSIS

Identify new SOI activations faster, make signal parameters and content available for further analysis and evaluation, analyze bit streams and create new customer-specific decoders and classifiers. Simulate signals for testing and training purposes.

- All analysis and decoder development tools in a single toolbox
- React to new or changing signals
- As SOIs change, the signal processing solution will adapt
- User expertise flows straight into the application, no knowledge transfers to third parties necessary

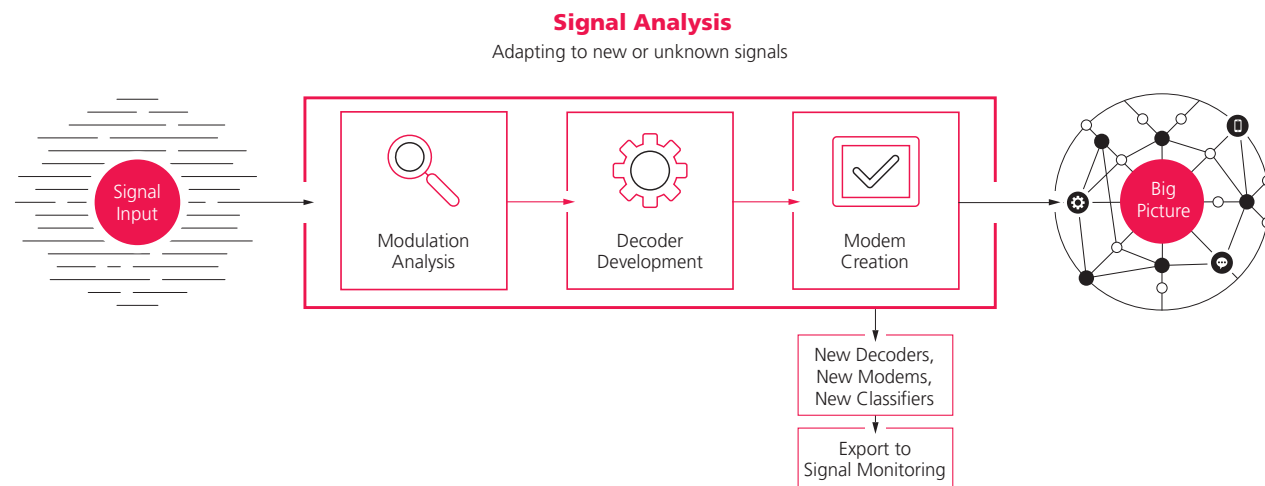

MODULATION ANALYSIS

go2signals Modulation Analysis tools are used to measure technical parameters of unidentified signals and determine new modem and signaling types. With its parametrizable demodulators data content is extracted for further Decoder Development. The signal world is constantly changing, go2signals helps to stay current.

- Comprehensive set of built-in analysis tools
- Special modulation and code analysis features for communications signals
- Individual analysis displays supporting precise, analytic measurements
- Simulate complex signals and signal scenarios



DECODER DEVELOPMENT

go2signals has its own Python-based Decoder Description Language (pyDDL), enabling its users to create their individual decoders, add existing decoders, or customize the output of currently available decoders. Therefore, all decoders are written in pyDDL and the source code is supplied with most. The Decoder Development Environment covers the full range of software development functionality including code editing, code analysis, testing and more.

- React to new or changing signals with flexibility: Create and edit individual decoders
- Employ individual knowledge in customer-specific decoders
- Specialized set of commands for pre-processing, searching, reading, transformation and output formatting
- Visualize, evaluate and process demodulated bitstreams
- Check and verify unidentified bit streams against known / existing decoders
- Search for repeating and non-periodic patterns and recursive sequences
- Utilize a full decoder development environment with an integrated debugger

MODEM CREATION

Save the results (modulation parameters and decoder) as a new modem (,Modem Descriptor File') for go2signals to use for automatic and manual processing.

- Universal, freely parameterizable demodulators
- Free linking of demodulator and decoder
- Use of a generic file format, usable in all go2signal tools
- Stay independent and protect users' decoder expertise



ANALYSIS SUITE

Technical Specifications Document
www.procitec.com/go2signals-specifications-analysis



DECODERLIST

List of all available Decoders
www.procitec.com/go2signals-decoderlist

PRODUCT GLOSSARY

SUITES

MONITORING SUITE	Bundles all products around monitoring and signal production
ANALYSIS SUITE	Bundles all products around signal analysis, signal simulation and decoder development
COMPONENTS SUITE	Bundles all products around integrable system components

PRODUCTS

GO2MONITOR	Radio monitoring, signal classification, signal decoding and signal recording software solution for complete signal scenario surveillance (HF, VHF, UHF, SAT bands)
GO2MONITOR LOWSWAP	Radio monitoring, signal classification, signal decoding and signal recording software solution for complete signal scenario surveillance (HF, VHF, UHF, SAT bands) optimized for low-SWaP equipment
GO2MONITOR OPERATOR	Application for setting up additional operator stations for manual signal processing and result viewing for an existing central go2MONITOR system
GO2MONITOR RESULT	Application to set up an additional workplace for go2MONITOR result processing
SCL	Software integrable automatic signal modulation and modem classification C++ library
GO2DECODE	Analysis, demodulation and decoding of known and unknown radio signals. Creating and editing of customerdefined modems and decoders
SIGNAL ANALYZER	Manual and automated modulation analysis in an outstanding user-friendly way. Easy and fast analysis of unknown signals.
GO2ANALYSE	Analysis, evaluation and manipulation of bit streams for the determination of coding characteristics
GO2KEY¹	Automatic key detection for ARC4 (e.g. Motorola Enhanced) of DMR radios

PRODUCT OPTIONS

PMR-DECODERS²	Additional set of PMR and SAT recognizers, demodulators and decoders
MIL-DECODERS¹	Additional set of military demodulators and decoders
WCL-10/20	Enhance coherent wideband input up to 10 and 20 MHz (1 and 2.4 MHz HF)
WBR-10/20	Enhances wideband recording and playback up to 10 and 20 MHz
WMPC-16/32¹	Extends the number of automatic (option AMT is required) classification, demodulation and decoding channels up to 16, 32 or more (in steps of 32)
AMT	Multi channel full automatic task based monitoring (decoding, recording, classification)
NRC-4/8	Allows input and control of 4 or 8 handoff receivers
HOPPERDETECTION¹	Recognition and recording of frequency-hopping signals up to 20 MHz input bandwidth VUHF (2.4 MHz HF), options WCL-20, WBR-20 and AMT are required
OFDM ANALYSIS	Provides a set of tools specialized in the analysis and demodulation of Orthogonal Frequency Division Multiplexing (OFDM) modulated signals for Signal Analyzer tool.
RCM FRAMEWORK	Receiver control framework for customer integration of own receiver hardware
REMOTECONTROL API	System remote control C++ library and API interface for go2MONITOR



GO2SIGNALS FOR INTEGRATORS

Brochure
www.procitec.com/go2signals-brochure-integrators

EXPORT CONDITIONS:

- ¹ May require export approval prior to supply
- ² Requires export approval prior to supply

EXAMPLE USE CASES

Additional use cases or product configurations on request.

Manual monitoring of wideband HF/VUHF signal scenarios	Automatic monitoring of wideband HF/VUHF signal scenarios	Semi-automatic monitoring of wideband HF/VUHF signal scenarios on low SWaP hardware	Signal modulation analysis	Automatic search key for ARC4 encrypted DMR radios	Add customer-defined decoders	Integrate modulation and modem classification in external software	Integrate full signal monitoring in external software
--	---	---	----------------------------	--	-------------------------------	--	---

MONITORING SUITE

GO2MONITOR-1/2/4/8	●	●					●
MIL-Decoders	○	○					○
PMR-Decoders	○	○					○
WCL-10/20	○	○					○
WBR-10/20	○	○					○
AMT		●					○
WMPC-16/32		○					○
NRC-4/8		○					○
Hopperdetection		○					○
RemoteControl API						○	●
RCM Framework							
GO2MONITOR LOWSWAP			●				
MIL-Decoders			○				
PMR-Decoders			○				
RCM Framework							
GO2MONITOR OPERATOR	○	○					○
GO2MONITOR RESULT		○					○

ANALYSIS SUITE

GO2DECODE STANDARD				●			
MIL-Decoders				○			
PMR-Decoders				○			
GO2DECODE PROFESSIONAL	○	○		○		●	○
MIL-Decoders	○	○		○		○	○
PMR-Decoders	○	○		○		○	○
GO2ANALYSE	○	○				○	○
SIGNAL ANALYZER				●			
GO2KEY						●	

COMPONENTS SUITE

SIGNAL CLASSIFIER LIBRARY (SCL)							●
--	--	--	--	--	--	--	---

● = required ○ = optional